

Diesel Product Line


BSJD250KWSP
250 kWe / 250 kWe



POWERDAK
 POWER PRODUCTS, LLC


Enclosures (LEGACY)

Level 1 & 2 | Side View (Weather Proof)

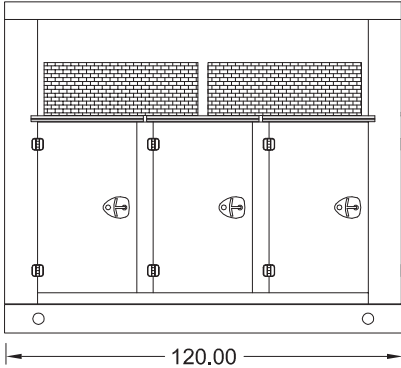


All enclosures are 150 MPH Wind Rated.
 Level 2 & 3 enclosures include sound attenuation foam.

Level 3 | Side View (Sound Attenuated)

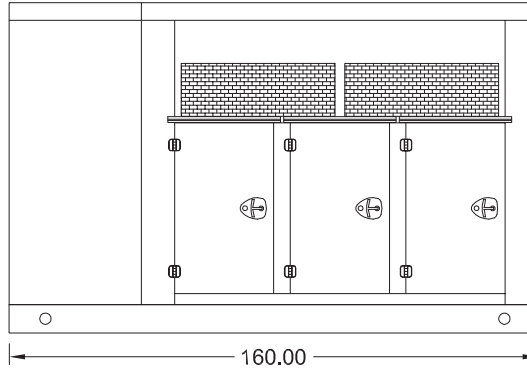


Level 3 enclosure includes frontal sound & exhaust hood.
 *Enclosure height does not include exhaust stack.

Level 1, 2 & 3 | Rear View

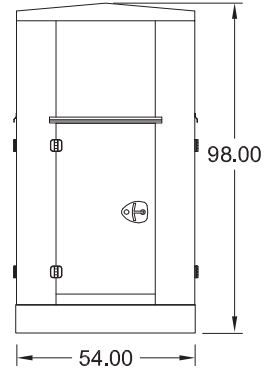

Double Wall UL 142 Listed Fuel Tanks

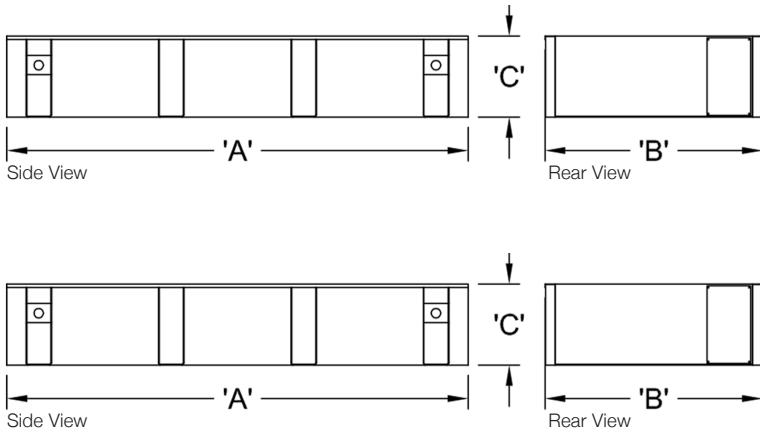

	OPU / Level 1 / Level 2		
	24 Hour 540 Gallon	48 Hour 1080 Gallon	72 Hour 1620 Gallon
A	120.00	185.00	264.00
B	54.00	54.00	54.00
C	28.00	36.00	36.00

	Level 3		
	24 Hour 540 Gallon	48 Hour 1080 Gallon	72 Hour 1620 Gallon
A	160.00	186.00	264.00
B	54.00	54.00	54.00
C	24.00	36.00	36.00

All specification sheet dimensions are represented in inches.

All enclosures and fuel tanks are based on the standard standby unit configuration. Any deviation can change dimensions. Materials and specifications subject to change without notice.

Powerdak Power Products-3350 Jet Drive, Rapid City, South Dakota 57703-605.341.6160 Ext.1-Fax 605.718.9998
 email:dave@dakgenerator.com

American Owned



American Made

BSJD250KWSP
250 kWe / 250 kWe